R & M STEEL CO

STEEL BUILDING COMPONENTS


PBR-36 (26-GA) Components & Applications

Thank you for your business.
To place an order, you may:

Phone: 1-208-454-1800 Toll Free: 1-866-454-1800
Fax: 1-208-454-1801 Toll Free: 1-866-454-1801
Email: sales.rmsteel@gmail.com

PBR-36

Commercial 26-Gauge
Trim and Accessories

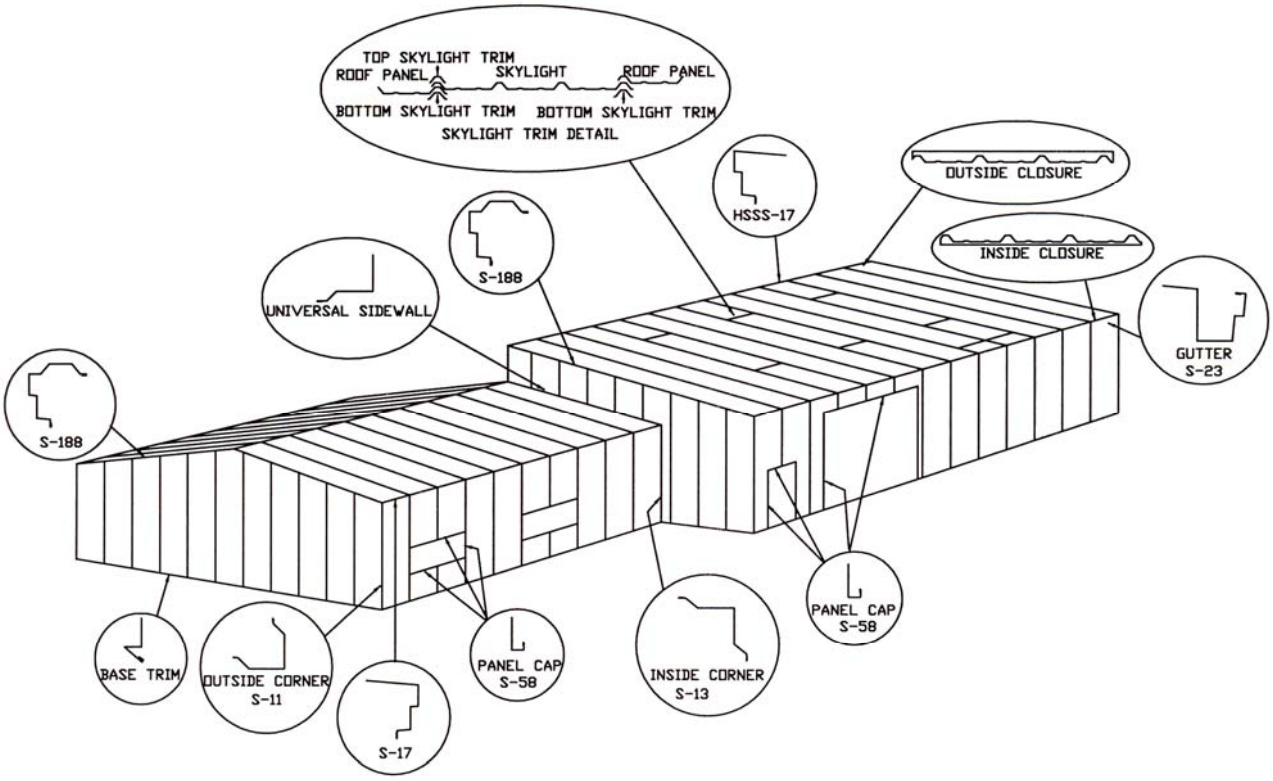

R & M STEEL CO


STEEL BUILDING COMPONENTS

PBR-36 (26-GA) Commercial Trim Selection

Thank you for your business.
To place an order, you may:

Phone: 1-208-454-1800 Toll Free: 1-866-454-1800
Fax: 1-208-454-1801 Toll Free: 1-866-454-1801
Email: sales.rmsteel@gmail.com


Universal Ridge




Die Formed Ridge




S-11 Outside Corner

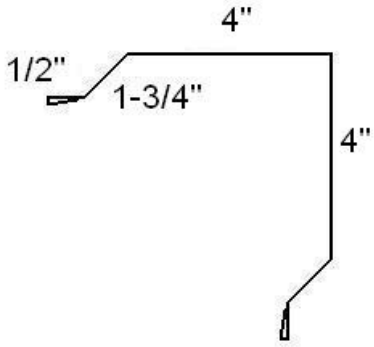


S-188 Gable Trim

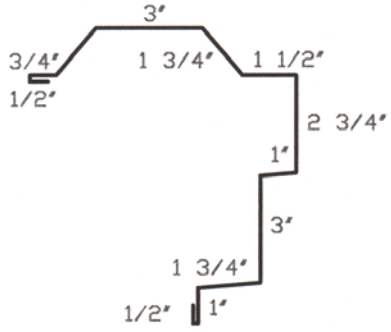


HSSS S-17 High Side Single Slope Eave Trim




S-17 Eave Trim

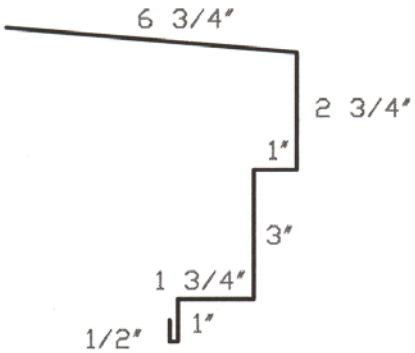


S-23 Gutter

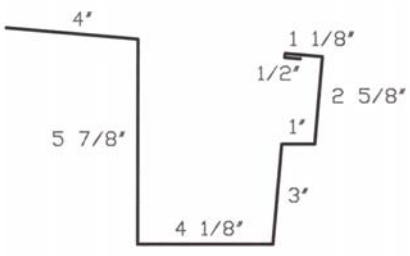

S-58 Panel Cap

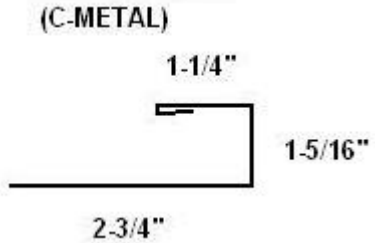

S-13 Inside Corner



R & M STEEL CO


STEEL BUILDING COMPONENTS

PBR-36 (26-GA) Commercial Trim Selection


Thank you for your business.
To place an order, you may:

Phone: 1-208-454-1800 Toll Free: 1-866-454-1800
Fax: 1-208-454-1801 Toll Free: 1-866-454-1801
Email: sales.rmsteel@gmail.com


Commercial Sidewall




Endwall Flashing




Commercial Mini-Gable

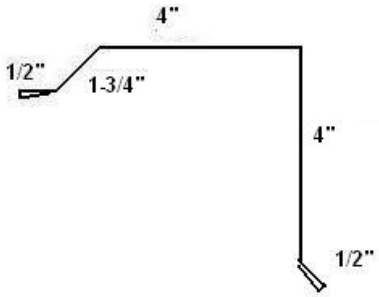


Base Trim



Gutter End Caps

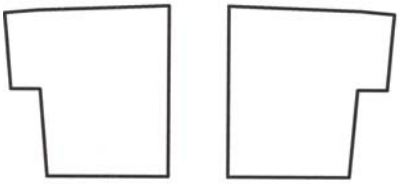


Mini Eave




CURRENTLY NOT AVAILABLE

Universal Ridge Cap
(ROLLFORMED)




Downspouts




Gutter Straps

Standard Flat
1”



Optional Formed

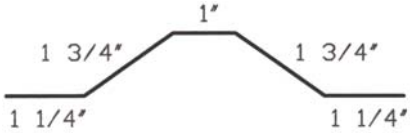

R & M STEEL CO

STEEL BUILDING COMPONENTS

PBR-36 (26-GA) Commercial Trim Selection


Thank you for your business.
To place an order, you may:

Phone: 1-208-454-1800 Toll Free: 1-866-454-1800
Fax: 1-208-454-1801 Toll Free: 1-866-454-1801
Email: sales.rmsteel@gmail.com

Sold in Bags of 250 Pieces

Metal-to-Wood


Wood Fast Self-Drilling
1/4" Head



Galvanized or Painted	Carton Qty.
12-14 x 3/4" Stitch	4000
9 x 1	2500
9 x 1-1/2	2000
9 x 2	2000
9 x 2-1/2	1500
9 x 3	1000

Metal-to-Metal TEKS®

Self-Drilling 5/16 Head




Galvanized or Painted	Carton Qty.
12-14 x 1-1/4"	2500
12-14 x 1-1/2"	2000
14 x 7/8 Lap TEK	2500
12-24 x 1-1/2 TEK #5	2000

Pop Rivets



Painted	Carton Qty.
1/8" Diameter x 1/8" Grip	1000

MAXI SEAL SCREW

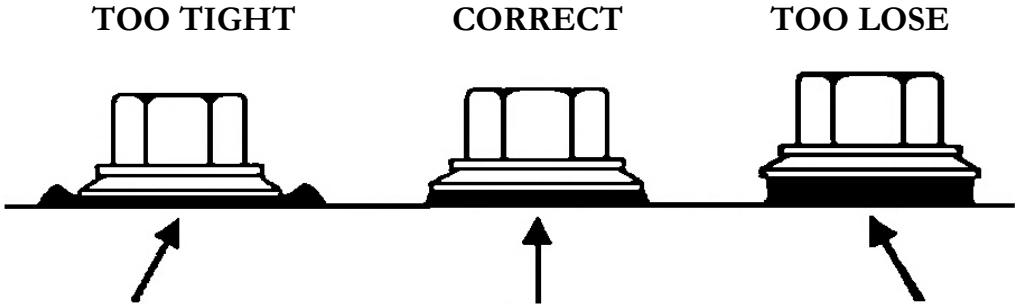

Metal Washer Deformed – Sealing Material Extruded Beyond Edge of Washer

Sealing Material. Slightly Visible at Edge Of Metal Washer - Assembly is Weather Tight

Sealing Material Not Visible – Not Enough Compression to Seal Properly

NOTE: **Roof**: approx. **80** fasteners required per square
Wall: approx. **60** fasteners required per square

R & M STEEL CO

STEEL BUILDING COMPONENTS


PBR-36 (26-GA) Accessories

Thank you for your business.
To place an order, you may:

Phone: 1-208-454-1800 Toll Free: 1-866-454-1800
Fax: 1-208-454-1801 Toll Free: 1-866-454-1801
Email: sales.rmsteel@gmail.com

SUNSKY 12™

Clear Polycarbonate Panels 11'

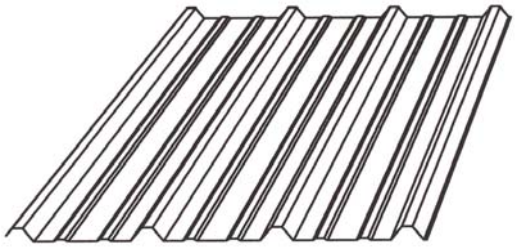



Vented Formed Closure



Outside Closure w/Adhesive



Inside Closure w/Adhesive

CLOSURES

Formed Closure (Inside or Outside)	100 per Carton
Vented Formed Closure	25 per Carton
Universal Closure 1-1/2" x 1-1/2" x 25'	30 per Carton
Universal Closure 2" x 2" x 25'	10 per Carton

BUTYL SEALANT

3/4 x 3/32 x 45'	24 Rolls per Carton
7/8 x 3/16 x 40' (TS-324)	10 Rolls per Carton
5/32 x 3/16 x 11/32 x 1-1/4 x 30' Triple Bead (TS-324)	16 Rolls per Carton

WALK DOORS

Universal Swing Insulated Door Frame kit consists of white 8-1/4" frame, hinges, lever-lock, weather strip, and threshold.	
Size	**Options**
3070	
3070	Mortise Lock Prep
3070 with ½ glass	
4070	
6070	

R & M STEEL CO

STEEL BUILDING COMPONENTS


PBR-36 (26-GA) Standard Accessories

Thank you for your business.
To place an order, you may:

Phone: 1-208-454-1800 Toll Free: 1-866-454-1800
Fax: 1-208-454-1801 Toll Free: 1-866-454-1801
Email: sales.rmsteel@gmail.com

PIPE FLASHING

- Fits all sheet profiles
- Takes all types of pipe
- Waterproof and dustproof
- Easily attached to pipe
- Temperature range: -90ºF to 250º
- Available High-Temp up to 450º

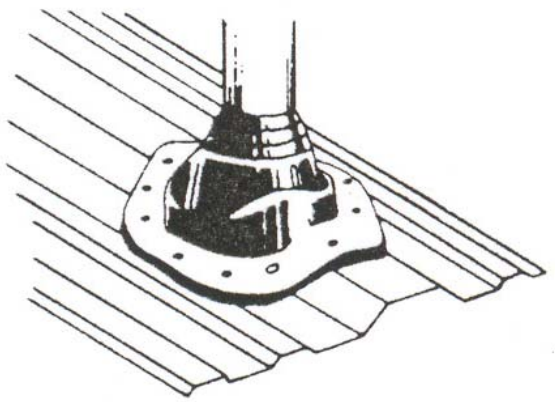

Size	Base Diameter	Pipe Size
#1	4 ¾"	¾" - 2"
#2	6 ¾"	1 ¾" - 3 ¼"
#3	7 ¾"	¼" - 4"
#4	9 ¼"	3" - 6"
#5	10 ¾"	4 ¼" - 7 ½"
#6	12 ½"	5" - 9"
#7	14 ½"	6" - 11"
#8	16 ½"	7" - 13"

DIRECTIONS

- Before cutting hole in sheet consider the best position to suit the size of flasher selected.
- Cut a neat hole with minimum clearance for pipe and install pipe.
- Rubber sleeve should be a watertight fit on pipe. If rubber has to be cut to suit pipe size, use a sharp pair of scissors and avoid nicks.
- Apply silicone sealant to underside of base and using water as a lubricant, slide flashing along pipe until it meets sheet.
- Press base into contours of sheet by hand.
- Drill two holes opposite each other and fasten. Progressively complete the fastening by pressing base firmly to sheet to avoid gaps. If there is a sharp corner in the valley, use a blunt tool to press the base into place.
- Dress excess silicone caulk around flasher base for attractive professional finished installation.